

# METALCASTING

## Project Fact Sheet



## A PROCESS TO RECOVER AND REUSE SULFUR DIOXIDE IN METALCASTING OPERATIONS

### BENEFITS

- Projected energy savings of 75% for a medium sized foundry to recover and reuse  $\text{SO}_2$  and the carrier gas
- Captures and reuses efficiency of over 95% for  $\text{SO}_2$  and the carrier gas without further purification
- Rapid, one year payback
- Eliminates scrubber chemicals for waste treatment

### APPLICATIONS


Pressure swing adsorption to recover and reuse  $\text{SO}_2$  can replace the current operation of using  $\text{SO}_2$  once and then discarding it by purging the mold with dry air or nitrogen that must be scrubbed with a caustic solution. The process might be applied to other operations that use or produce  $\text{SO}_2$  such as lead and copper smelting, food preservation, and flue gases from power plants.

## PRESSURE SWING ADSORPTION WILL RECOVER 99.5% OF THE SULFUR DIOXIDE USED IN FORMING COLD BOX MOLDS FOR METALCASTING

Sulfur Dioxide ( $\text{SO}_2$ ) is used as a catalyst in forming cold box molds and cores. The present, wasteful mode of operation uses the  $\text{SO}_2$  once, then discards it by purging the mold with dry air or nitrogen. That effluent is then scrubbed (at about 98% efficiency) with a caustic solution, which is then flushed into a sewer or delivered to a waste treatment facility.

The new process is based on pressure swing adsorption, and requires no regenerant; hence, it produces no waste streams. Preliminary testing showed recovery rates of 99.5% for  $\text{SO}_2$  and 99.8% for the carrier gas that allow for reuse without further purification. The principal operating cost is for power consumed in evacuating the adsorbent vessels during blowdown, and maintaining low pressure during purge. Employing this process will reduce energy consumption, eliminate the need for caustic effluent, and pay back in less than one year.

### NEW PSA-BASED SYSTEM

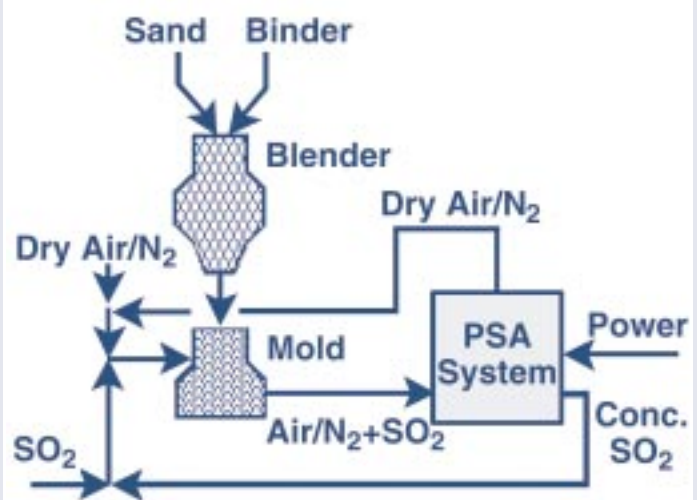

**New sandcasting  $\text{SO}_2$  recycling technology using a pressure swing adsorption system for gas recovery instead of a wasteful scrubber system.**



## Project Description

**Goal:** The goals of this project are to design and construct a prototype SO<sub>2</sub> recovery and reuse system that will be installed and tested in a variety of foundries.

The pressure swing adsorption system consists of one or two stages, depending on the application. The pressure swing cycle ensures continuous processing of the foundry off-gases and complete recovery of the excess SO<sub>2</sub>. The proposed project will include the design and construction of a pilot-scale prototype using the new pressure swing process to be tested at two or more foundries currently using scrubbers for their waste SO<sub>2</sub>. This will demonstrate the new technology without disrupting normal operations. In addition, new features to reduce energy losses due to pressure drop will be demonstrated.


## Progress and Milestones

- Final tests on adsorbents are ongoing. Once the adsorbents are selected, design and construction of the prototype equipment will begin.
- Once the unit is constructed, it will be installed at two or more foundries for on-site testing under industry conditions.
- Evaluation of unit performance and integrity will follow with necessary unit modifications to optimize the system.
- An operation manual will be developed along with a marketing campaign to promote the system while on-site testing continues.

## Industry of the Future—Metalcasting

*The metalcasting industry – represented by the American Foundrymen's Society (AFS), North American Die Casting Association (NADCA), and the Steel Founder's Society of America (SFSA), has prepared a document, "Beyond 2000," to define the industry's vision for the year 2020. OIT's Metalcasting Vision Team partners with metalcasters, national laboratories, universities, and trade/environmental/technical organizations to develop and implement energy efficiency technologies that benefit both the industry and the United States. Recently, the Metalcasting Team facilitated the development of the Metalcasting Technology Roadmap, which outlines industry's near-, mid-, and long-term R&D goals.*

*OIT Metalcasting Industry Team Leader: Harvey Wong (202) 586-9235.*



**NICE<sup>3</sup>**—National Industrial Competitiveness through Energy, Environment and Economics an innovative, cost-sharing program that promotes energy efficiency, clean production, and economic competitiveness in industry. This U.S. Department of Energy (DOE), Office of Industrial Technologies grant program provides financial assistance of up to \$525,000 to state and industry partnerships for projects that demonstrate advances in energy efficiency and clean production technologies. The industrial partner may receive a maximum of \$500,000 in federal funding. Non-federal cost share must be at least 50% of the total cost of the project.

### PROJECT PARTNERS

NICE<sup>3</sup> Program  
U.S. Department of Energy  
Washington, DC

Adsorption Research, Inc.  
Dublin, OH

Ohio Department of Development  
Columbus, OH

### FOR PROJECT INFORMATION, CONTACT:

Kent Knaebel, Ph.D.  
Adsorption Research, Inc.  
6175-D Shamrock Ct.  
Dublin, OH 43016  
Phone: (614) 798-9090  
Fax: (614) 798-9091  
[info@adsorption.com](mailto:info@adsorption.com)  
<http://www.adsorption.com>

### FOR MORE INFORMATION ABOUT THE NICE<sup>3</sup> PROGRAM, CONTACT:

Lisa Barnett  
NICE<sup>3</sup> Program Manager  
Phone: (202) 586-2212  
Fax: (202) 586-7114  
[lisa.barnett@ee.doe.gov](mailto:lisa.barnett@ee.doe.gov)

Visit our home page at  
[www.oit.doe.gov](http://www.oit.doe.gov)

Office of Industrial Technologies  
Energy Efficiency  
and Renewable Energy  
U.S. Department of Energy  
1000 Independence Ave. SW  
Washington, D.C. 20585-0121



DOE/GO-10099-695  
September 1999